


## 300 250 200 Stress - MPa 150 100 Typical DAM, -40 C Typical DAM, 23 C 50 Typical DAM, 65 C Typical DAM, 121 C 0 0.005 0.01 0.015 0.02 0.025 0 0.03 0.035 Strain - mm/mm

## VLF 80207 EM HS Tensile Stress/Strain Data Molded Specimen Data

No information supplied by RTP Company constitutes a warranty regarding product performance or use. Any information regarding performance or use is only offered as suggestion for investigation for use, based upon RTP Company or other customer experience. RTP Company makes no warranties, expressed or implied, concerning the suitability or fitness of any of its products for any particular purpose. It is the responsibility of the customer to determine that the product is safe, lawful and technically suitable for the intended use. The disclosure of information herein is not a license to operate under, or a recommendation to infringe any patents.



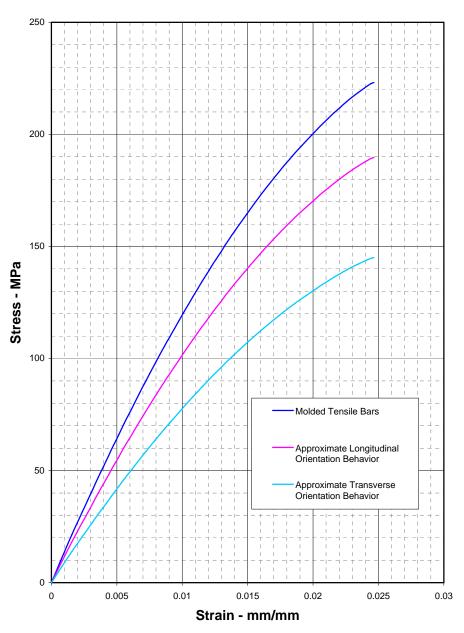

## VLF 80207 EM HS Design Data (23 Degrees C)

No information supplied by RTP Company constitutes a warranty regarding product performance or use. Any information regarding performance or use is only offered as suggestion for investigation for use, based upon RTP Company or other customer experience. RTP Company makes no warranties, expressed or implied, concerning the suitability or fitness of any of its products for any particular purpose. It is the responsibility of the customer to determine that the product is safe, lawful and technically suitable for the intended use. The disclosure of information herein is not a license to operate under, or a recommendation to infringe any patents.